

# omni

## OMNI INSERTER

INTELLIGENCE. EASE OF USE. SIMPLICITY.

Universal Instruments' Value Series brings cost-effective intelligence, ease of use and simplicity to back-end electronics assembly automation. The Omni Inserter™ leverages a linear motor positioning system and a host of intelligent features to deliver accurate, high-speed insertion of axial, radial and other odd-form components. It supports a range of feeder types and features an active clinch and controlled insertion force.


The Omni Inserter provides single-process efficiency to complement multi-process cells and maximize line utilization while minimizing floor space requirements. Features include:

- Four independent insertion heads with standard active clinch
- High-force & programmable insertion modes; force monitoring
- Four upward-looking cameras utilizing AI & AOI vision algorithms
- Best-fit insertion algorithm
- CAD data import
- Independent pick & place sequences
- Portfolio of standard feeders; on-the-fly replenishment
- Board shuffle mode

### BENEFITS & VALUE



**HIGH INSERTION QUALITY**  
Detect current changes, monitor insertion force to ensure insertion quality



**HIGH INSERTION ACCURACY**  
Best fit algorithm compensates for PCB positioning and component pin variations, increasing the insertion rate to **>99.5%**




**FAST INSERTION RATE**  
Components are inspected and positioned for insertion simultaneously, shortening the cycle time; Optimal path algorithm



**LOW REJECT RATE**  
AI and AOI algorithm enhance image, reduce background interference, improve pin positioning, and reduce reject rate to **<1%**




**FAST NPI PROCESS**  
Offline programming optimizes the sequence of insertion heads and feeders to create streamlined products



**SUPPORT FOR A VARIETY OF COMPONENTS**  
Full range of reliable feeding solutions accommodate a variety of components and packaging


#### BEST-FIT ALGORITHM

##### TRADITIONAL INSERTER



Skewed pins = high reject rate

##### OMNI INSERTER



Best-Fit algorithm increases the success rate of insertion to **>99.5%**


#### AI + AOI ALGORITHM

##### RAW NG IMAGE



Traditional insertion machine considers this NG image as reject

##### THROUGH AI MODEL




**78% reduction in reject rate**

##### AI + AOI ALGORITHM RESULTS



AI with AOI algorithm reduces background interference and precisely locates pins

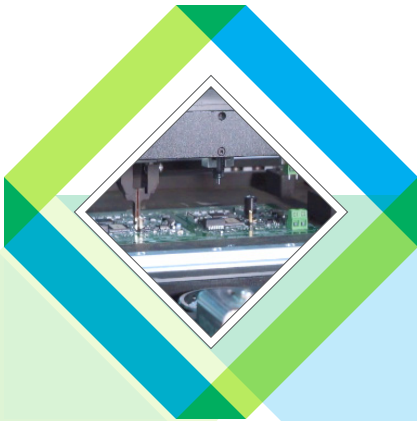



Omni Inserter Specifications	
<b>Positioning System</b>	Single-gantry linear motor
<b>Insertion Heads</b>	4 heads, independent Z and theta rotation
<b>Component Picking Method</b>	Pneumatic gripper, vacuum nozzle
<b>Cameras</b>	4 ULCs for components / 1 fiducial camera
<b>Feeder Inputs</b>	6 inputs
<b>Insertion Rate</b>	1.35 seconds/pc *1
<b>Throughput</b>	2,600 cph
<b>Insertion Success Rate</b>	>99% *2
<b>Insertion Accuracy</b>	±40µm
<b>Reject Rate</b>	<1% *3
<b>PCB Dimensions</b>	Minimum size: 50mm [W] x 80mm [L] Maximum size: 400mm [W] x 360mm [L] (standard), 400mm [W] x 500mm [L] (option)
<b>PCB Thickness</b>	Bare board 1.2-2.0mm / Carrier ≤10mm
<b>Max Component Size</b>	diameter: 35mm, height: 40mm, weight: ≤50g
<b>Max Weight of PCB &amp; Carrier</b>	5kg

**Notes:**

- \*1. Using standard components and nozzles under optimal conditions
- \*2. PWB hole ≥ component PIN diameter 0.6mm
- \*3. Exclusive of faulty components

**Modular design. Independent control. Full range of feeders.**

The Omni Inserter supports a complete portfolio of component presentation options. Regardless of what components you're inserting or how they're packaged, we offer cost-effective feeders for your product mix.



MC-7370

©2023 Universal Instruments Corporation. All rights reserved. All specifications are subject to change.

www.uic.com  
universal@uic.com

**AMERICAS**  
Tel. 1-800-432-2607  
Tel. +1-607-779-7522

**EUROPE**  
Tel. +421-2-4930-96-60

**CHINA, SHENZHEN**  
Tel. +86-755-2685-9108

**CHINA, SHANGHAI**  
Tel. +86-21-6495-2100

**PENANG, MALAYSIA**  
Tel. +60-4-644-7067